

Product technical sheet

CLIMBOO 0402



3 - 14 years



13 kids



26,1 m²

Material specification

- Hot-dip galvanized and powder coated or powder galvanized and powder coated steel construction of 80 x 80 mm profile,
- Fireman's pole made of hot-dip galvanized and powder coated or powder galvanized and powder coated steel,
- Climbing walls made of durable anti-slip and waterproof plywood or HPL plate,
- Durable climbing stones made of polyester resin composite with mineral fillers,
- Steel ropes in polypropylene braid, connected with durable plastic elements, stainless steel or aluminum,
- Ladders made of steel ropes in polypropylene braid and rungs made of synthetic material,
- Hot-dip galvanized and powder coated steel bars,
- Screws covered with plastic caps and/or stainless steel screws,
- Safe end caps on top of the structure made of rubber or polypropylene,



Physical development



pull-up



climbing





7

number of activity elements

Product technical sheet

CLIMBOO 0402




Product data

| | |
|--------------------------------|---------------------|
| Length | 256 cm |
| Width | 172 cm |
| Total height | 194 cm |
| Age group | 3 - 14 years |
| Number of users | 13 kids |
| Safety zone | 26,1 m ² |
| Free fall height | 180 cm |
| In accordance with norm EN | 1176-1:2017 |
| Weight of the heaviest part | 30 kg |
| Dimensions of the largest part | 243x8x8 cm |
| Availability of spare parts | YES |
| Installation time | 6 h |

Data is subject to change without prior notice.

Additional information

- equipment intended for public playgrounds;
- equipment has a certificate issued by an accredited entity or a declaration of conformity;
- no sharp edges or chinks that would pose a danger of jimmie the head, fingers or any other body parts;
- anchoring on flat surface, 80/70/60 cm deep;
- render is for reference only, the actual appearance of the equipment and its color may vary;

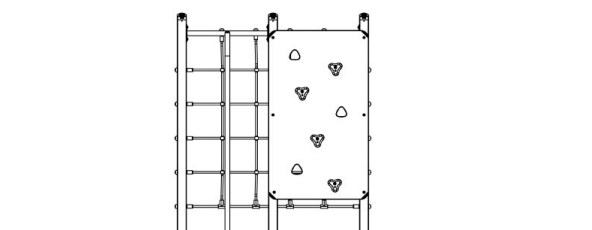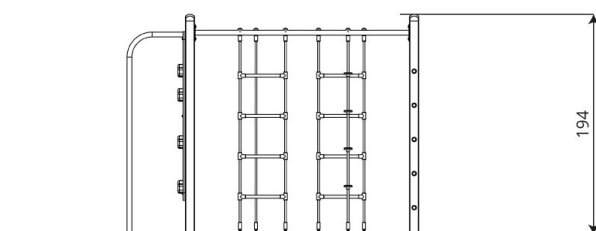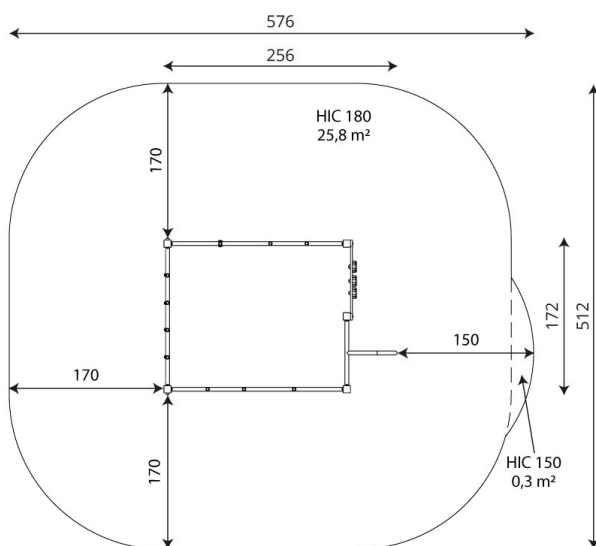

Guarantee

30

30 year guarantee - Structural strength of steel and stainless steel components

15

15 year guarantee - Structural failure of steel and stainless steel, for dynamic equipment

10

10 year guarantee - Structural failure of high density polyethylene and high pressure laminates components

5

5 year guarantee - Corrosion of stainless steel and hot dip galvanized and powder coated components; against bark beetles and rot in case of wooden structural elements

Detailed information in the guarantee card

Vinci Group Sp. z o.o.
Seminarnyja 9 Street
99-400 Łowicz

VAT: 534-250-14-46
PHONE: +48 42 203 24 99 ext. 26
M: +48 793 404 991



biuro@vinci-play.com
info@vinci-play.com
www.vinci-play.com

Surfaces according to EN 1176-1:2017

| | Description (mm) | Layer thickness (cm) | Maximum fall heights (cm) |
|---------------------------------|------------------------------|----------------------|---------------------------|
| Turf/ top layer of soil (A,B,C) | - | - | ≤100 |
| bark (A,C) | Particle size from 20 to 80 | 30 | ≤200 |
| | | 40 | ≤300 |
| woodchips (A,C) | Particle size from 5 to 30 | 30 | ≤200 |
| | | 40 | ≤300 |
| sand or gravel (A,C) | Particle size from 0,25 to 8 | 30 | ≤200 |
| | | 40 | ≤300 |
| synthetic attested (A,B,C) | Tested according to EN 1177 | | 180 |

Product technical sheet

CLIMBOO 0402

Amount of safe surface corresponding with free fall height:

HIC 150 0,3 m²

HIC 180 25,8 m²

Data is subject to change without prior notice.

