STAIRS & RAMP

FSW229



Item no. FSW22900-0902		
General Product Information		
Dimensions LxWxH	101 x 415 x 163 cm	
Age Group	13+	
Capacity	2 adults	
Colour Options		





The stair and ramp resembles some common everyday obstacles. Walking on an inclining slope and overcoming stairs. The simplest use is just walking back and forth on the module, but with variations in the task, specific skills can be trained. For example focusing on balance by walking without hand support or focusing on strength and mobility by deliberately using as long steps a possible. The stairs are available in two different versions: normal stairs or steep stairs. These can also be used for simple effective exercises like step-ups and lunges. The ability to walk safelyon an inclining or declining slope is very important for the elderly. If body posture is not correctly aligned with the surface, the risk of falling is increased. With support from the rails, this skill can be trained in a safe environment.



Data is subject to change without prior notice.


STAIRS & RAMP

FSW229







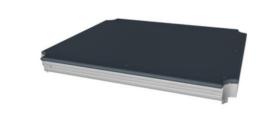

The Four-steps are 900x280mm and have a height of 171mm.

The ramp is mounted under a 150 and has a length of 2300mm. The ramp is made from 5mm Aluminum plate with an anti-slip pattern.

All decks are supported by unique designed aluminum profiles with multiple attachment options by usage of pressure molded aluminum connectors. The HPL decks with a thickness of 17,8mm with a very high wearing strength and a unique KOMPAN nonskid surface texture.

Installation Information		
Max. fall height	6	9 cm
Safety surfacing area	26.5 m²	
Numbers of Installers (persons)		2
Total installation time		11
Excavation volume	0.33 m³	
Concrete volume	0.1 m³	
Footing Depth (Standard)	90 cm	
Shipment Weight	343 kg	
Anchoring options	In-ground	~
	Surface	~
Warranty information		
Panels	Lifetime	
Post	10 Years	
Floors (decks)	10 Years	
Galvanised structural parts	Lifetime	
Spare parts guaranteed	10 Years	

Item no. FSW22900-0902



The railing height is 930mm and the distance between the railing is 900mm The material used for the railing is hot-dip galvanized steel Ø38 mm, a great diameter for a good grip and to support the wrist.



The information sign is made of a PA6 (Polyamide) and shows the most relevant exercise and a QR code. When scanned the QR code will link to an animated illustration of the exercise and offers the possibility of downloading the KOMPAN sport & fitness App, which will provide a large amount of exercises and workouts.




Post are made of Ø101.6 x 2mm, pregalvanized carbon steel and powder coated, a great protection to all conditions.





STAIRS & RAMP

FSW229





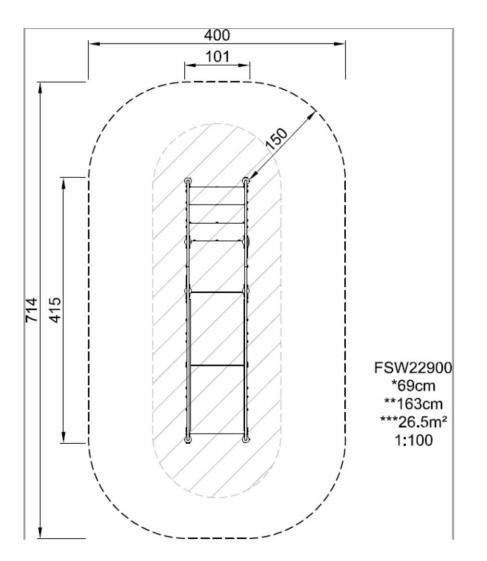



Max fall height | Total height

FSW22900 1:100

Click to see 1:100 ratio TOP VIEW

Click to see 1:100 ratio SIDE VIEW

3/30-01-2020

Data is subject to change without prior notice.