

Cableway Start Platform

PCM1023



The design of the start section for a cableway oozes stability and spaciousness. The start section facilitates turn-taking and cooperation when handing over the cable glider to others. Getting up on the platform stimulates important motor skills as balance and coordination.

Item no. PCM102300-0902	
General Product Information	
Dimensions LxWxH	119x316x170 cm
Age group	4+
Play capacity (users)	-
Colour options	●




Cableway Start Platform

PCM1023



Platform

Social-emotional: the platform allows for more children to be together and share. Important life skills like courage, self-confidence, consideration and turn-taking are built.

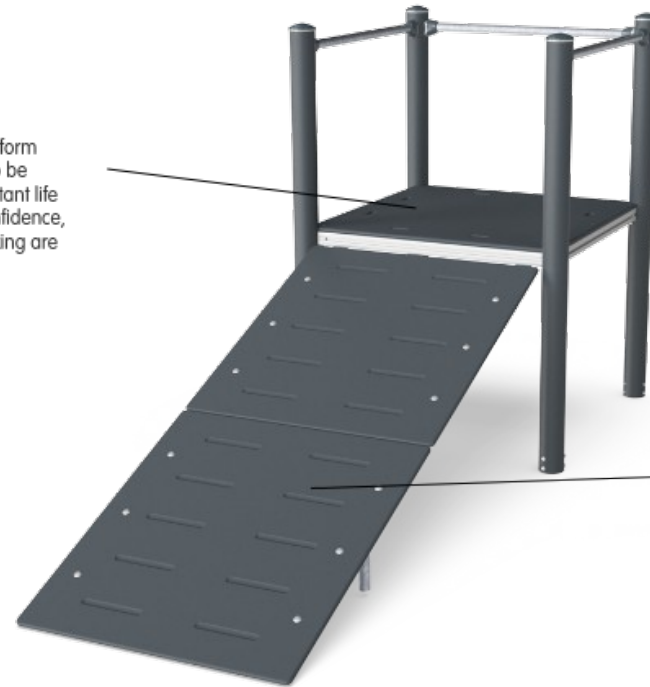

Slope

Physical: inclined crawling or walking up or down develops the sense of balance and cross coordination.

Social-emotional: the inclination makes climbing feel secure, especially for younger children.

Cableway Start Platform

PCM1023

Item no. PCM102300-0902		
Installation Information		
Max. fall height	88 cm	
Safety surfacing area	23.0 m2	
Number of installers	2	
Total installation time	5.8	
Excavation volume	0.15 m3	
Concrete volume	0.00 m3	
Footing depth (standard)	85 cm	
Shipment weight	229 kg	
Anchoring options	In-ground	✓
Warranty Information		
EcoCore HDPE	Lifetime	
Post	10 years	
Spare parts guaranteed	10 years	





Cradle to Gate A1-A3	Total CO ₂ emission	CO ₂ e/kg	Recycled materials
	kg CO ₂ e	kg CO ₂ e/kg	%
PCM102300-0902	465.90	2.73	22.60

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Kompan A/S

C.F. Tietgens Boulevard 32C
DK-5220 Odense SØ
Denmark



Validation of CO₂ calculation of: Play systems



Data version no. 2021-01-11

The CO₂ calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Play systems" represented by item no.: PCM200309-0010. (Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 15. October 2021 | Valid until: 15. October 2023

Validated by:

Bente Hviid

Bente Hviid, Senior Consultant

Peter Bendtsen

Peter Bendtsen, Senior Consultant

Validation based on report: Validation of CO₂ calculation of play systems – Kompan, version 1.0, prepared by: Bureau Veritas HSE, Denmark: Bente Hviid and Peter Bendtsen.

Publication date: 15. October 2021

By Bureau Veritas HSE
www.bureauveritas.dk
+45 7731 1000




Cableway Start Platform


PCM1023

* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

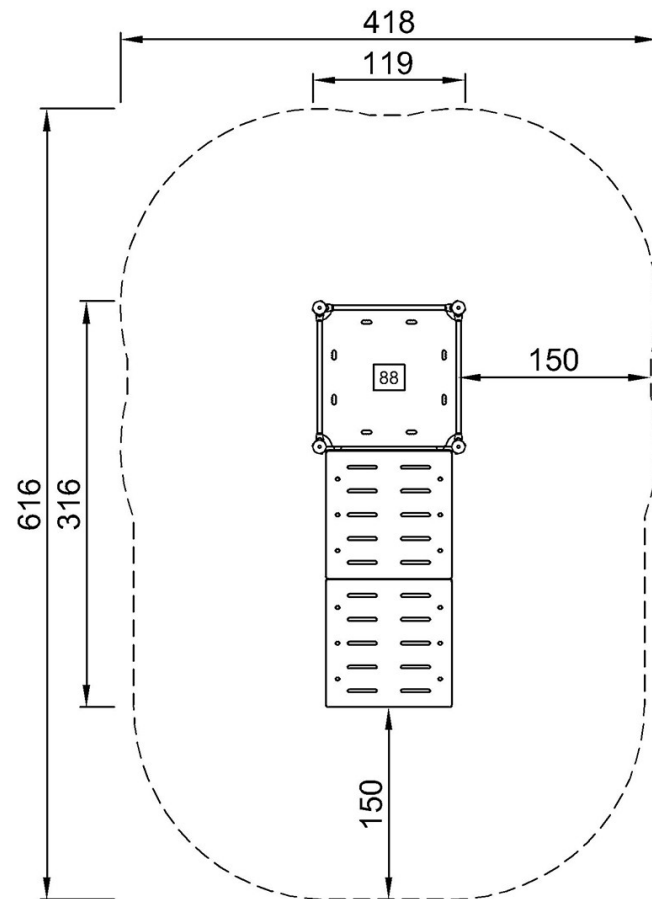

PCM102300
*88cm
**170cm
***23m²

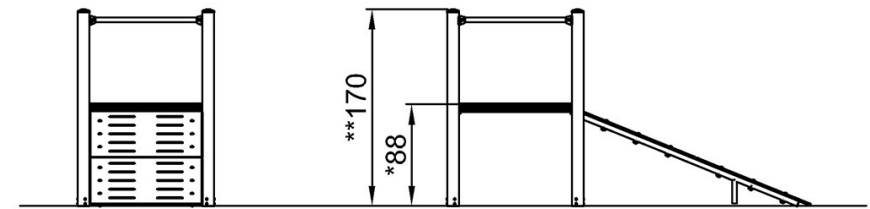

PCM102300
1:100

[Click to see TOP VIEW](#)

[Click to see SIDE VIEW](#)