
PCE211422





Wow! The Kakuda is a fantastic structure that children love. The variety of activities encourages children to play longer and come back again and again. The Kakuda offers ample climbing for active children. The tunnel provides the opportunity to crawl, supporting spatial understanding. The varied climbing units train proprioception and cross-body

coordination, which are fundamental for children's reading skills. The slides and the fireman's pole are thrilling paths down to the ground, and as well as climbing and sliding, there are plenty of opportunities for social play that will help children to build important social and emotional skills, and will motivate children to play for longer.








PCE211422



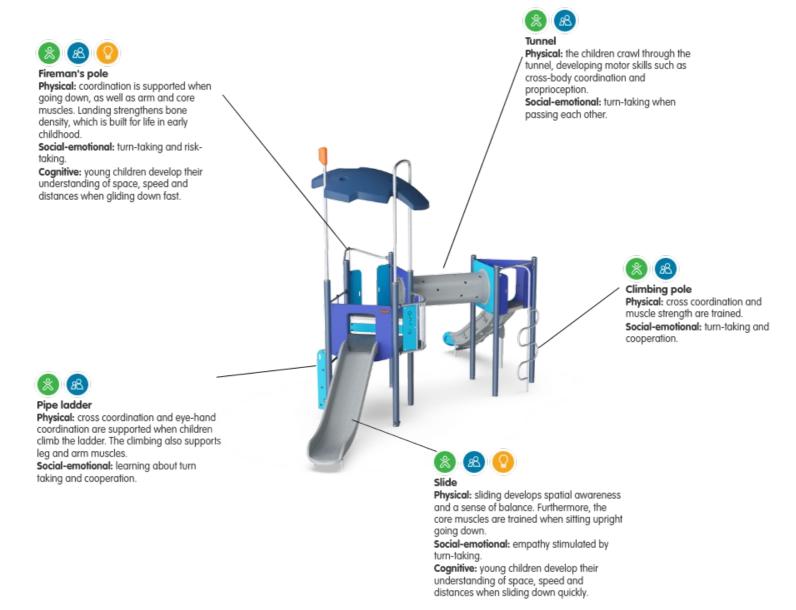

PCE211422




148 cm

41.6 m2

0.42 m3

19.0



Panels of 19mm EcoCore™. EcoCore™ is a highly durable, eco friendly material, which is not only recyclable after use, but also consists of a core produced from 100% recycled post consumer material from food packing waste.



The ELEMENTS roofs are made of recyclable PE with a minimum wall thickness of 5 mm to ensure high durability in all climates around the world. The steel pipes are hot dip galvanised inside and outside for maximum durability.



Sails of commercial 95 high density PE knitted specially for sun-shade structures. The sails are treated with UV stabilizers to ensure a long lifetime. The sails are supported by a hot dip galvanised steel frame and tightened by stainless steel devices



Concrete volume 0.07 m3 Footing depth (standard) 90 cm 605 kg Shipment weight Anchoring options In-ground Surface **Warranty Information** FcoCore HDPF Lifetime Post 10 years PP Decks 10 years Hollow PE parts 10 years Spare parts guaranteed 10 years

Item no. PCE211422-0901 Installation Information

Max. fall height

Safety surfacing area

Number of installers Total installation time

Excavation volume



The main posts are made of high quality pregalvanized steel with powder coated top finish. Post tops are closed with caps of UV stabilized nylon (PA6). The grey colored molded decks are made of 75% post-consumer ocean waste PP material with a non-skid pattern and texture surface. All decks are supported by unique designed low-carbon aluminum profiles with multiple attachment options.



The slides are available in either moulded PE in different colours or in full stainless steel AISI304 t= 2mm.



The steel surfaces are hot dip galvanised inside and outside with lead free zinc. The galvanisation has excellent corrosion resistance in outside environments and requires low maintenance.



3 / 9/15/2022 Data is subject to change without prior notice.

Sustainability





Cradle to Gate A1-A3	Total CO ₂ emission	CO₂e/kg	Recycled materials
	kg CO₂e	kg CO₂e/kg	%
PCE211422-0901	1,231.70	2.63	40.60

The overall framework applied for these factors is the Environmental Product Declaration (EPD), which quantifies "environmental information on the life cycle of a product and enable comparisons between products fulfilling the same function" (ISO, 2006). This follows the structure and applies a Life-Cycle Assessment approach to the entire Product stage from raw material through manufacturing (A1-A3))

Kompan A/S

C.F. Tietgens Boulevard 32C DK-5220 Odense SØ Denmark



Validation of CO2 calculation of: Play systems



Data version no. 2021-01-11

The $\rm CO^2$ calculation and data are in compliance with the principles of a carbon footprint impact according to the GHG protocol (Greenhouse Gas Protocol), Scope 3, cradle to gate related to all individual components in the product category: "Play systems" represented by item no.: PCM200309-0010.

(Scope 3 emissions include emission sources in the upstream and downstream value chain).

Date: 15. October 2021 | Valid until: 15. October 2023 Validated by:

Bente Hviid, Senior Consultant

Peter Bendtsen, Senior Consultant

 $\label{eq:Validation} Validation of cO^2\ calculation\ of\ play\ systems-Kompan,\ version\ 1.0,\ prepared\ by:\ Bureau\ Veritas\ HSE,\ Denmark:\ Bente\ Hviid\ and\ Peter\ Bendtsen.$

Publication date: 15, October 2021


By Bureau Veritas HSE www.bureauveritas.dk +45 7731 1000


PCE211422



* Max fall height | ** Total height | *** Safety surfacing area

* Max fall height | ** Total height

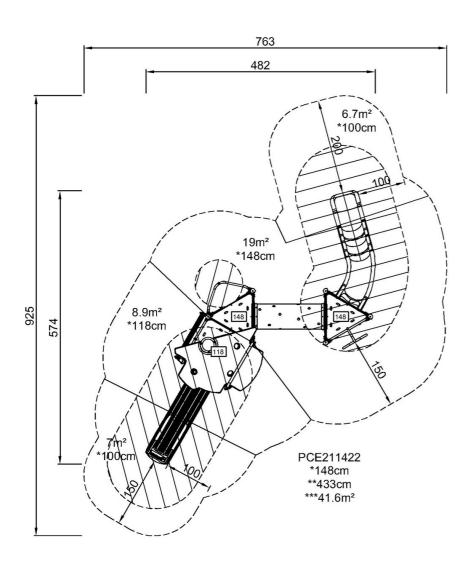

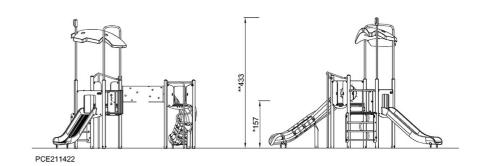

Click to see SIDE VIEW

Click to see TOP VIEW