

ROBINIA RB1902



6+



24 kids


 55,2 m²


Material specification

- Construction made of Robinia - very durable acacia wood with a diameter of ~ 12 - 18 cm without sharp edges, resistant to weather conditions,
- Platforms, gangways, side panels and seats made of Robinia - very durable acacia wood, resistant to weather conditions,
- Roofs made of strong Robinia acacia wood with colorful elements made of HPL plate, resistant to weather conditions,
- Side panels made of durable HPL plate, resistant to weather conditions,
- Slides made of stainless steel,
- Colorful elements made of durable HPL plate, resistant to weather conditions,
- Moving elements made of durable HPL plate, resistant to weather conditions,
- Telescope made of stainless steel and durable HDPE plate, resistant to weather conditions,
- Flags made of HPL plate, resistant to weather conditions, mounted on a stainless steel structure,
- Windows made of Plexiglas mirrors in a safe cover made of HPL plate, resistant to weather conditions,
- Grates made of safe, certified rubber with textile reinforcement,
- Climbing stones made of durable HPL plate, resistant to weather conditions, and stainless steel,
- Steel ropes in polypropylene braid, connected with durable plastic elements, stainless steel or aluminum,
- Calibrated stainless steel chains, preventing fingers entrapment,
- Handles made of steel rope in polypropylene braid,
- Screws covered with plastic caps and/or stainless steel screws,



Facilitating disability



shelters



Intellectual development



thinking



Physical development



balance



hiding



sliding



observation



community



rest



passage



climbing





1
number of towers



1
number of slides




1
number of roofs




3
number of
interactive elements



8
number of activity
elements

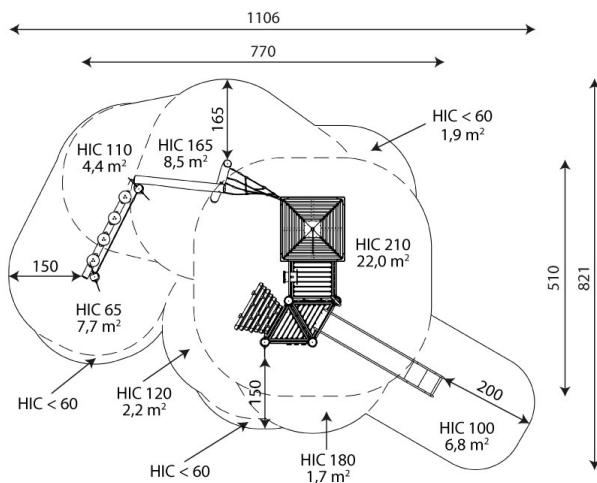

55,2 m²

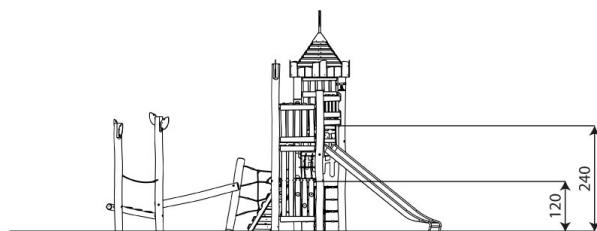

Guarantee

30

30 year guarantee -
Durability of steel and
stainless steel
structural elements

15

15 year guarantee - Durability
of steel and stainless steel
structures of mobile devices;
durability of Robinia wood
structural elements

10

10 year guarantee - Structural
strength of HDPE, 100% recycled
HDPE and HPL elements;
structural elements made of
100% recycled material
(composite)

5

5 year guarantee - Corrosion resistance
of stainless steel and hot-dip galvanized
and powder-coated steel elements,
resistance to bark beetles and rotting of
wooden structural elements

Detailed information in the guarantee card

Vinci Sp. z o.o.
Seminaryjna 9 Street
99-400 Łowicz

VAT: 534-265-18-84
PHONE: +48 42 203 24 99 ext. 26
M: +48 793 404 991

04/08/2025

Product technical sheet ROBINIA RB1902

Product data

Length	770 cm
Width	510 cm
Total height	505 cm
Age group	6+ years
Number of users	24 kids
Safety zone	55,2 m ²
Free fall height	210 cm
The height of the platforms	120, 180, 210, 240 cm
slide platform height	180 cm
In accordance with norm EN	1176-1:2017+A1:2023
Weight of the heaviest part	63,0 kg
Dimensions of the largest part	420x18x18 cm
Availability of spare parts	YES

Data is subject to change without prior notice.

Additional information

- equipment adapted for the disabled; intended for public playgrounds;
- equipment has a certificate issued by an accredited entity or a declaration of conformity;
- no sharp edges or chinks that would pose a danger of jamming the head, fingers or any other body parts;
- anchoring on flat surface, 80/70/60 cm deep;
- slide should not be installed southwards;
- render is for reference only, the actual appearance of the equipment and its color may vary;



biuro@vinci-play.com
info@vinci-play.com
www.vinci-play.com

Surfaces according to EN 1176-1:2017+A1:2023

	Description (mm)	Layer thickness (cm)	Maximum fall heights (cm)
Turf/ top layer of soil (A,B,C)	-	-	≤ 100
bark (A,C)	Particle size from 20 to 80	30	≤ 200
		40	≤ 300
woodchips (A,C)	Particle size from 5 to 30	30	≤ 200
		40	≤ 300
sand or gravel (A,C)	Particle size from 0,25 to 8	30	≤ 200
		40	≤ 300
synthetic attested (A,B,C)	Tested according to EN 1177		210

Product technical sheet

ROBINIA RB1902

Amount of safe surface corresponding with free fall height:

HIC <60	1,9 m ²
HIC 65	7,7 m ²
HIC 100	6,8 m ²
HIC 110	4,4 m ²
HIC 120	2,2 m ²
HIC 165	8,5 m ²
HIC 180	1,7 m ²
HIC 210	22,0 m ²

Data is subject to change without prior notice.

