


Multi-training


ref. BCM031




www.bragmaia.com

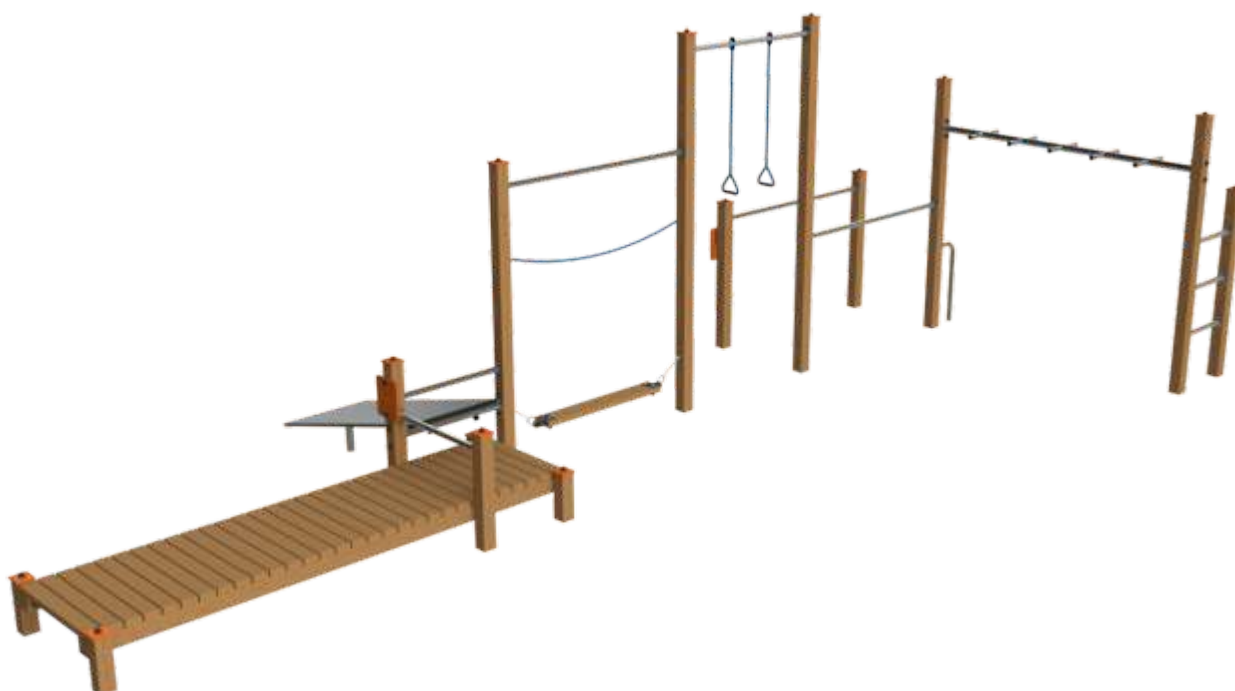


+6 Years



1.80 m





57 m²



**x= 3.70
y= 8.20
z= 2.60**

Data Sheet

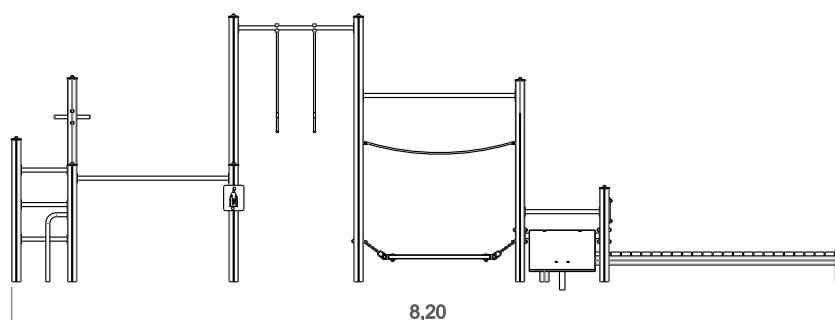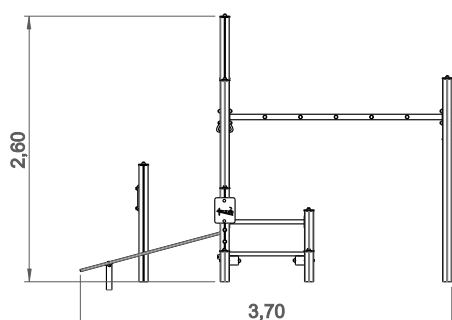


Equipment Information:





www.bragmaia.com

— Impact area
- - Free space

EN 1176-1,3

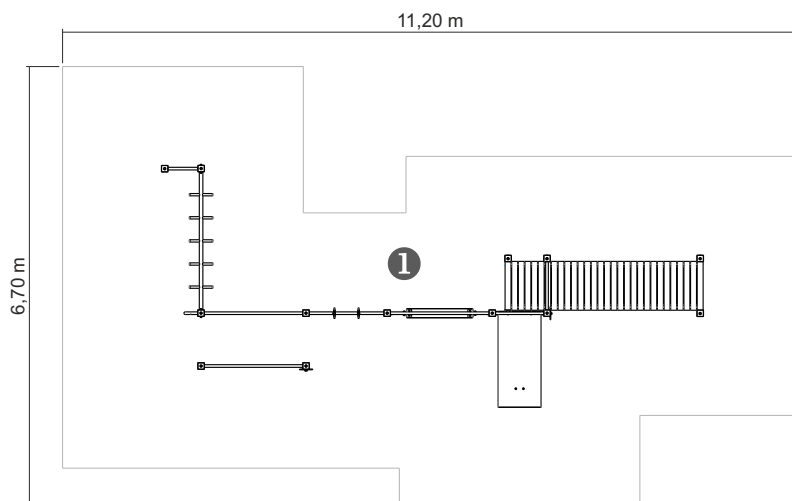


.....	①
1,80	
57	
	57



Technical Information:

- 1 - Abdominal Crunch 0.60m
- 2 - Lower Back 0.30m
- 3 - Parallel Bars 1.00m
- 4 - Balance Crossing 1.80m
- 5 - Trapeze 1.60m
- 6 - Wall Bars 1.60m

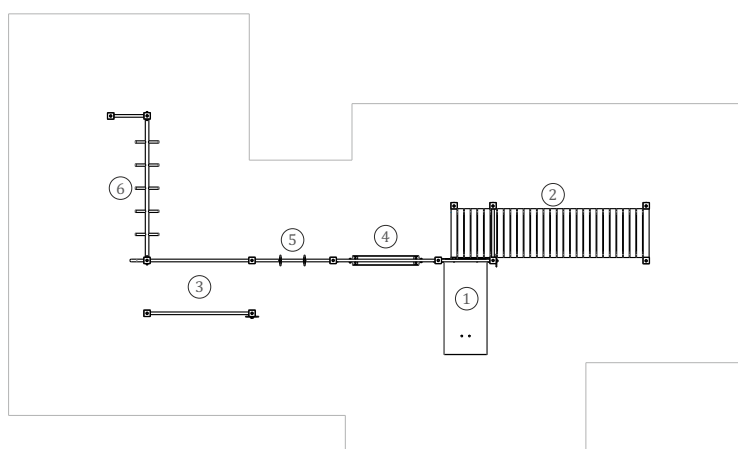


Technical Characteristics:



Vertical Posts

Wood: Laminated pinewood classified with guarantee of quality by continuous internal control. With autoclave treatment, protecting it from attacks of fungus, insects and termites. Finishing on aqueous base ink, specially developed to protect the wood from humidity, weather and U.V.

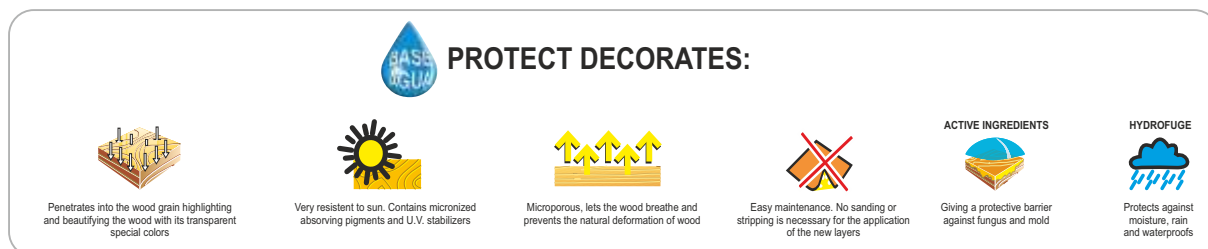

Panels

HDPE: Monocolour/bicolour high density polyethylene. It is a polymer so it is characterized by its resistance to corrosion and chemical products. By its capacity of elasticity and lightweight, it offers high resistance to impacts, and, therefore, very difficult to break. The synthetic base prevents growth of bacteria and fungus. No need for maintenance;

Marine plywood: Non-slip, bonded with phenolic resins resistant to the weather and U.V., according to EL 314-2/classe 3 (DIN 68 TS TCIL3: BFU 100, BS 6566 PART 8 : WBP);

Ropes: Ø16mm steel ropes coated in reinforced polypropylene fibers, connection accessories in HDPE with U.V. protection, fixing elements in galvanized hot steel;

Metal parts

Tubes:

Stainless steel: AISI 304, Ø40mm and Ø54mm;

Fixation System:

Type C - Standard fixation system composed by posts applied directly in the ground with concrete;

Screws and accessories

Screws: Galvanized steel or optionally stainless steel AISI 304;

Capsules: PP Polypropylene plastic;



100% recyclable;

