
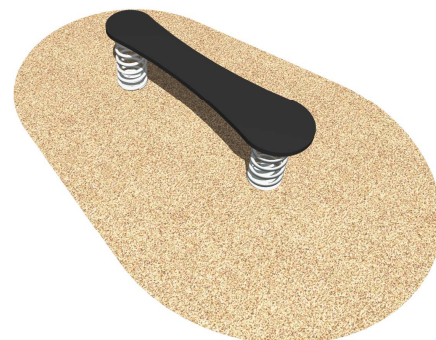


Construction are made from glued wood, galvanized steel.

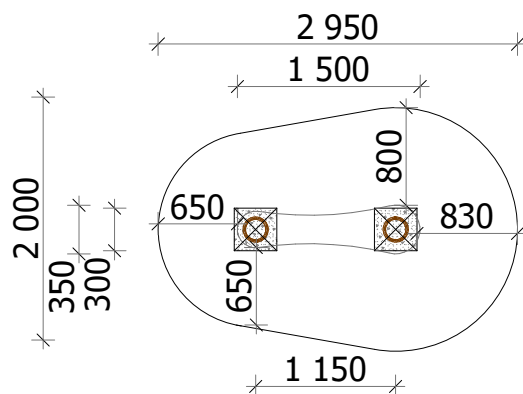

Minimal required area - 5 m<sup>2</sup>


Length: 1 500 mm  
Width: 300 mm  
Height: 460 mm

Playground are provided for outdoor use in supervising of adults


Length of safety area: 2 950 mm  
Width of safety area: 2 000 mm  
Required safety area: 5 m<sup>2</sup>



MAX  
4 children



Children  
from 5 - 14  
years



The Fall  
height  
H=0.41 m




Weight  
30 kg



Assembly  
1 h  
(without excavation  
and concreting)

Equipment safety checkings must be performed once in a week in high vandalism risk areas.


Maintenance are required once in every 3 months, depending on usage

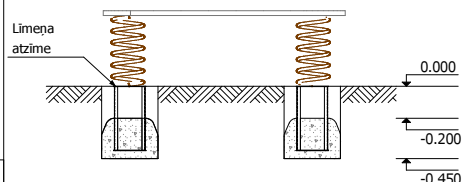

Play equipment are established with concreted steel foundation in equipment location. Equipment are suitable for use in two days after concreting, when the foundation are totally solid. During assembling there are not children allowed in area.

#### Adequate temperature

T<sub>min</sub> - 33.2 °C  
T<sub>max</sub> +52 °C



#### Snow load

1.22 kN/m<sup>2</sup>




#### Wing load

526 N



Under the play equipment should be surface coating according to the standard LVS EN 1176-1:2008

Potential surfaces

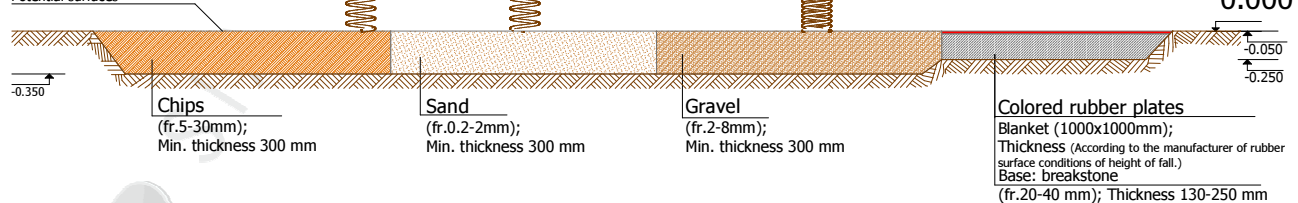

**Transportation:** One pack: 1 pack of 2 000 x 500 x 300 mm

**Spare parts:** All needed spare parts and elements, when warranty time expires can be ordered in „Jūrmalas Mežaparki” Ltd., and all the goods will be ready for delivery in 3 days.

According to LVS EN 1176:2008

Manufactured  
according:

