Danaus Fence

ref. MURVD750






Total measures:

Model	Length (mm) (C)	Width (mm) (L)	Lance height (mm) (AI)	Height (mm) (A)	Total height (mm) (A1)	Туре
VD750	2000	60	845	-	-	Lance
VD1000	1000	60	845	-	-	Lance
PVD750	1000	60	845	-	-	Door
VS7504A	90	90	-	800	1100	Post

General Tolerance: ± 5%

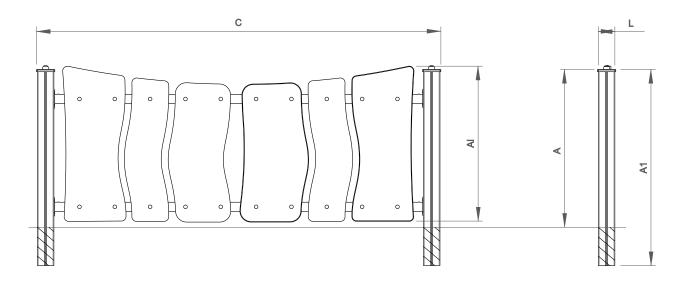

Equipment Information:







Technical Information:

1 - Danaus Fence



Technical Characteristics:



Vertical posts

Wood: Laminated pinewood classified with guarantee of quality by continuous internal control. ^E With autoclave treatment, protecting it from attacks of fungus, insects and termites. Finishing on aqueous base ink, specially developed to protect the wood from humidity, weather and U.V.



Panels

HDPE: Monocolour/bicolour high density polyethylene. It is a polymer so it is characterized by its resistance to corrosion and chemical products. By its capacity of elasticity and lightweight, it offers high resistance to impacts, and, therefore, very difficult to break. The synthetic base prevents grow of bacterias and fungus. No need for maintenance;

Metal Parts

Structure: Rectangular pipe and sheet steel with anticorrosive treatment of hot dip galvanizing in accordance with EN ISO 1461;

Fixation System:

Type B - Standard fixation system composed by steel base screwed to the ground with steel anchors;

Type C - Standard fixation system composed by posts applied directly in the ground with concrete;

Screws and accessories

Screws: Galvanized steel or optionally stainless steel AISI 304; **Capsules:** PP Polypropylene plastic;



