


SPRING 0616

COW SPRING RIDER



| Device Specifications              |                      |
|------------------------------------|----------------------|
| Safety zone                        | 11,26 m <sup>2</sup> |
| Length                             | 0,85 m               |
| Width                              | 0,43 m               |
| Total height                       | 0,74 m               |
| Free fall height                   | < 0,60 m             |
| Age range                          | 1-12 years           |
| In accordance w/ EN standards      | 1176-1:2017          |
| Weight of the heaviest part [kg]   | 34                   |
| Dimension of the biggest part [cm] | 86x130x42            |
| Availability of spare parts        | Yes                  |

Minimal space

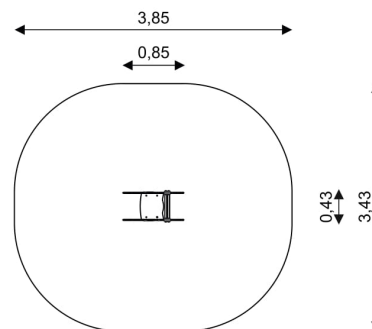

**Material Specification**

- Steel spring 20 mm, iron phosphorated and powder coated;
- The seat and other elements are made of atmospheric condition resistant HDPE plates;
- All screws covered with colorful plastic caps;
- No sharp edges or chinks that would pose a danger of jamming the head, fingers or any other body parts;
- Other galvanized and/or powder coated metal elements;

**Additional comments**

- The equipment is certified by an accrediting organization or by certificate of conformity;
- Depth of foundations on a flat surface: 40 cm;
- The equipment is designed for public playgrounds;

**Surfaces**

Due to the free fall height of the equipment, the EN 1176-1:2017 standard allows the following surfaces: turf, soil (A,B), sand with minimal layer thickness of 30 cm (A), synthetic material approved for free fall of 0,60 m (A,B)

