


SPRING 0626

CAT SPRING RIDER



Device Specifications	
Safety zone	11,68 m ²
Length	1,24 m
Width	0,21 m
Total height	1,01 m
Free fall height	< 0,60 m
Age range	1-12 years
In accordance w/ EN standards	1176-1:2017
Weight of the heaviest part [kg]	10,5
Dimension of the biggest part [cm]	121x80x2
Availability of spare parts	Yes

Minimal space

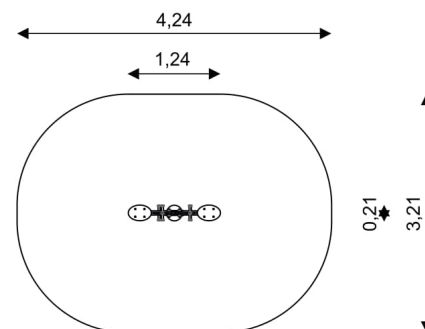

Material Specification

- Steel spring 20 mm, iron phosphorated and powder coated;
- Colorful, durable elements made of atmospheric condition resistant HDPE plate;
- All screws covered with plastic caps;
- No sharp edges or chinks that would pose a danger of jamming the head, fingers or any other body parts;
- Colorful and ergonomic, durable handles and footrests;

Additional comments

- The equipment is certified by an accrediting organization or by certificate of conformity;
- Depth of foundations on a flat surface: 40 cm;
- The equipment is designed for public playgrounds;

Surfaces

Due to the free fall height of the equipment, the EN 1176-1:2017 standard allows the following surfaces: turf, soil (A,B), sand with minimal layer thickness of 30 cm (A), synthetic material approved for free fall of 0,60 m (A,B)

