




**TECHNICAL DATA:**

Not easy accessible device,  
according to standard EN 1176-1:2017


Device dimensions:	9,71 x 5,18m
Device height:	2,30m
Minimum space:	13,15 x 8,52m
Falling area:	72,19m <sup>2</sup>
Critical fall height:	2,20m
Foundations depth:	-0,60m

**Top view with falling area**

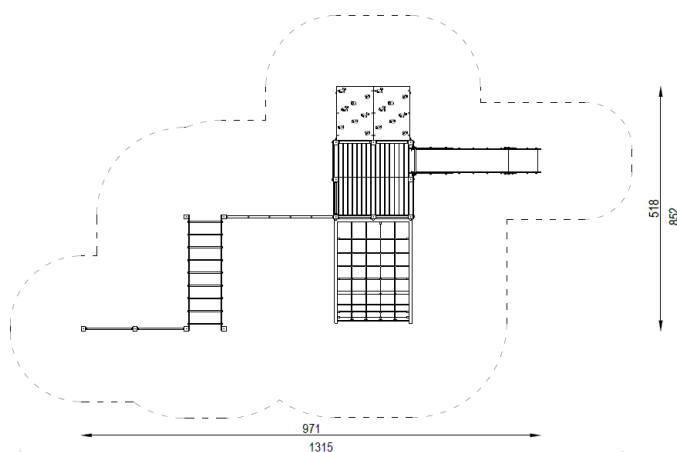

The device according to EN 1176-1:2012  
Playground equipment and surfacing – Part 1:  
General safety requirements and test methods

Safety surfaces: sand, gravel, bark, synthetic surface  
- minimal thickness for loose particulate materials 300+100mm  
- synthetic surface according to critical fall height

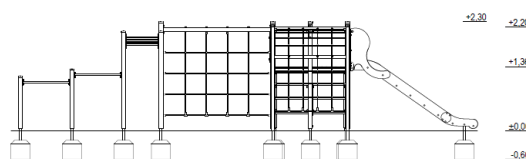

## COMPONENTS:

Tower with roof, platform 1,36m:	1 pc
Climbing wall 1,36m:	1 pc
Vertical ladder:	2 pcs
Slide 1,36m:	1 pc
Horizontal ladder:	1 pc
Vertical rope net:	1 pc
Arched rope net:	1 pc
Flip tube:	2 pcs

## MATERIALS:

Construction poles:	glued laminated pine timber, rounded at the edges, varnish painted dark brown
Anchors:	galvanized black steel
Flat decorative elements:	HDPE sheets,
Platforms, gangways:	impregnated pinewood boards, with machined anti-skid surface,
Steel elements:	galvanized black steel, powder coated
Surface of slope slide:	stainless steel,
Horizontal ladder:	sides made of HDPE board rungs: stainless steel
Climbing walls:	waterproof plywood, climbing grips, based on resins
Ropes:	polypropylene braided with a steel, interconnected by plastic fasteners
Caps:	plastic
Foundations:	concrete min. C12/15 standard



SATERNUS DISTRIBUTION Sp. z o.o. sp.k.  
ul. Nowa 32  
41-500 Chorzów, Poland

Certificate beholder:  
Producer:  
Distributor:

GRUPA SATERNUS Sp. z o.o. S. K. A. reserves all rights to protect copyright under the Act of February 4, 1994 on Copyright and Related Rights (Journal of Laws No. 28, item 83), and in particular Art. 78 and 79 of this Law.

GRUPA SATERNUS Sp. z o.o. S. K. A.  
Saternus Production Sp. z o.o. sp. k.  
Saternus Distribution Sp. z o.o. sp. k.