









TECHNICAL DATA:

Not easy accessible device, according to standard EN 1176-1:2017


Device dimensions:2,22 x 3,69mDevice height:3,60mMinimum space:5,01 x 7,02mFalling area:24,68m²Critical fall height:1,36mFoundations depth:-0,60m

The device according to EN 1176-1:2017 Playground equipment and surfacing – Part 1: General safety requirements and test methods

Safety surfaces:

- sand, gravel, bark, synthetic surface
- \min thickness for loose particulate materials 200+100mm
- synthetic surface according to critical fall height

Top view with falling area

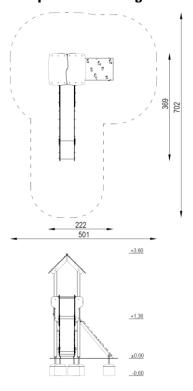

COMPONENTS:		MATERIALS:	
Tower with roof, platform 1,36m: 1 p Climbing wall 1,36m: 1 p Slide 1,36m: 1 p	1 pc 1 pc 1 pc 1 pc	Construction poles: Anchors:	glued laminated pine timber, rounded at the edges, varnish painted dark brown galvanized steel
		Flat decorative elements:	HDPE sheets,
		Platforms, gangways:	impregnated pinewood boards, with machined anti-skid surface,
		Steel elements:	galvanized steel, powder coated
		Surface of slope slide:	stainless steel, 1,5 mm thick
		Tic tac toe:	polypropylene rolls, screen-printed
		Caps:	plastic
		Foundations:	concrete min. C12/15 standard



SATERNUS DISTRIBUTION Sp. z o.o. sp.k. ul. Nowa 32 41-500 Chorzów, Poland

Certificate beholder: Producer: Distributor: GRUPA SATERNUS Sp. z o.o. S. K. A. reserves all rights to protect copyright under the Act of February 4, 1994 on Copyright and Related Rights (Journal of Laws No. 28, item 83), and in particular Art. 78 and 79 of this Law.

GRUPA SATERNUS Sp. z o.o. S. K. A. Saternus Production Sp. z o.o. sp. k. Saternus Distribution Sp. z o.o. sp. k.